

ASK-4® #601

AUDIO MONITORING SYSTEM

TECHNICAL DATA SHEET

DESCRIPTION

The ASK-4® #601 is a single zone audio monitoring system with a wall mounted mute switch. This system is designed to interface with a DVR, VCR or other recording devices that accept line level input. The APR-1 Audio Base Station contains a built-in 3" speaker and volume control for producing live audio and audio playback. The Verifact® A is an omnidirectional pre-amplified microphone that produces line level output. The MS-1 is an illuminated mute switch that can mute microphone output to recorder and is commonly used

KIT CONTENTS

- Verifact® Model A Microphone
- Model APR-1 Audio Base Station
- Model MS-1 Mute Switch
- Model AD-1 12Vdc power supply
- RCA cables for connection to the audio input of DVRs

APPLICATION

The ASK-4® #601 can be used in situations such as:

- Convenience Stores
- Fast Food Restaurants
- Customer Service Counters
- Cashier Booths

2 Conductor shielded cable, 22 gauge with a 24 gauge drain wire West Penn 452 or equiv) (not supplied by Louroe)



WIRING REQUIREMENTS

IMPORTANT NOTICE

When this equipment is used as part of an audio monitoring system, the law requires that the public be given notice of AUDIO MONITORING ON THE PREMISES. A decal notice is included with each microphone shipped.




Federal Law References:
Federal Regulations, US Code, Title 18. Crime and Criminal Procedure, Sec 2510.

SPECIFICATIONS OF MS-1 MUTE SWITCH

■ Supply Voltage	12Vdc
■ Dimensions	2 3/4" W x 4 1/2" H
■ Faceplate	303 Stainless Steel
■ Backbox	Single gang electrical box (not included)
■ Weight	2.5 oz

ASK-4® #601

APR-1 Base Station

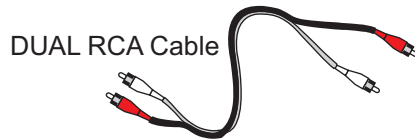

MS-1 Mute Switch



VERIFACT® A

FEATURES

- Omni-directional microphone can pick up normal sounds 15' away or within a 30' diameter circle.
- Model APR-1 has 3" speaker for monitoring live audio and playback from recorder.
- 3.5mm headphone jack for private listening.
- MS-1 switch turns off the microphone when it is not needed
- 12Vdc/110V power supply included
- Connector cables from audio output of APR-1 to audio input of recording device included

SPECIFICATIONS (Microphone - Model A)

■ Type	Electret Condenser
■ Output	Line Level (0 dB 600Ω @ 1 kHz)
■ Frequency response	50 Hz to 15 kHz ± 1 dB
■ Current drain	10 mA
■ Supply voltage	12Vdc
■ Dimensions	4" Dia x 1 1/2" H
■ Weight	3.5 oz

SPECIFICATIONS (Base Station - APR-1)

■ Monitor output power	1W@8Ω
■ Audio output impedance	600Ω @ 1kHz
■ Audio input impedance	10KΩ
■ Freq. response	100 Hz to 10 kHz
■ Headphone impedance	8 to 600Ω
■ Power supply	12 Vdc, 500 mA
■ Dimensions	8 1/4"L x 5 3/4"W x 1 3/8" H
■ Weight	1 lb 6 oz
■ Shipping Weight of kit	4 lbs