


## CVC605CMT1

3.6mm fixed board lens, stainless steel housing

## **Features**

- Full HD resolution over coax (HD-TVI)
- Supports up to 1080p @ 30fps
- Perfect for elevators, hallways, etc.
- Full OSD operation via UTC (TVI)
- Supports HD-TVI, CVI, AHD, 960H
- Signal distance up to 1600 ft. (depending on coax quality)\*
- 12VDC operation (power supply not included)
- 5 year warranty

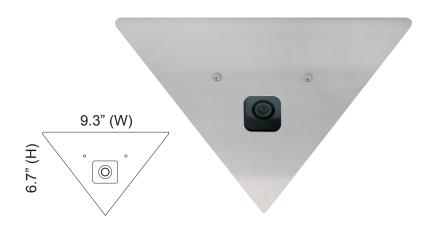









## **Specifications**

Image Sensor	1/2.9" 2MP CMOS
Resolution	1920 x 1080
Minimum Illumination	0.001 lux
Scanning System	Progressive
S/N Ratio	>52dB
Video Output	HD-TVI, CVI, AHD, 960H
Day/Night	Auto / Color / BW / EXT
White Balance	12VDC (power supply not included)
Brightness	0 - 20
DWDR	Off
Sens up	On
Backlight Compensation	Off
Communication	UTC

## **Operating & Unit Specifications**

Power Supply	12VDC (power supply not included)
Power Consumption	12VDC, 70mA
Operating Temperature	14° F - 122° F
Operating Humidity	20% - 80% RH
Storage Temperature	-22° F - 140° F
Dimensions	9.3" (W) x 6.7" (H)
Weight	1.4 lbs.



COMPLIANT

\*Products are in compliance with NDAA Section 889 Part B Guidelines

