



HD Analog WDR Miniature

4 in 1 STARVIS Module Camera

MD432WF Series


HD-TVI/HD-CVI/AHD/CVBS 4-in-1 WDR Module with Board Lens

- 32 x 32mm Super Mini Size
- 2MP Sony STARVIS CMOS Sensor
- True WDR
- TVI/AHD/CVI/CVBS Selectable by Optional OSD (Pre-program up on request)
- 3MP Mega Lens (Lens Options are Available)
- Ultra Low Light Color Camera
- Color : 0.05Lux, B/W : 0.008Lux
- Sens-up : Color 0.005Lux, B/W : 0.0005Lux
- Defog, 3D DNR
- UTC Function
- DC12V

Order Information

MD432WF245	2.45mm
MD432WF3	2.8mm
MD432WF4	3.6mm
MD432WF6	6mm
MD432WF8	8mm
MD432WF12	12mm

*We can customize with other lens options up on request

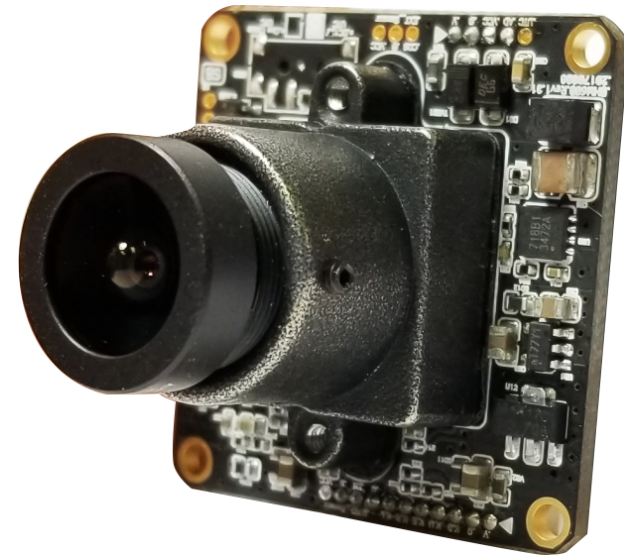

Infinite Pixels Electronic USA Inc.
6330 McLeod Dr Suite 2, Las Vegas NV 89120

www.ipxusa.com sales@ipxusa.com



HD Analog WDR Miniature

4 in 1 STARVIS Module Camera

MD432WF Series

HD-TVI/HD-CVI/AHD/CVBS 4-in-1 WDR Module with Board Lens

- 32 x 32mm Super Mini Size
- 2MP Sony STARVIS CMOS Sensor
- True WDR
- TVI/AHD/CVI/CVBS Selectable by Optional OSD (Pre-program up on request)
- 3MP Mega Lens (Lens Options are Available)
- Ultra Low Light Color Camera
- Color : 0.05Lux, B/W : 0.008Lux
- Sens-up : Color 0.005Lux, B/W : 0.0005Lux
- Defog, 3D DNR
- UTC Function
- DC12V


Optional OSD Operation



*Pre-program up on request

Press RIGHT Key for 5sec : AHD
 Press LEFT Key for 5sec : CVBS
 Press UP Key for 5sec : CVI
 Press DOWN Key for 5sec : TVI

General Feature Diagram (mm)

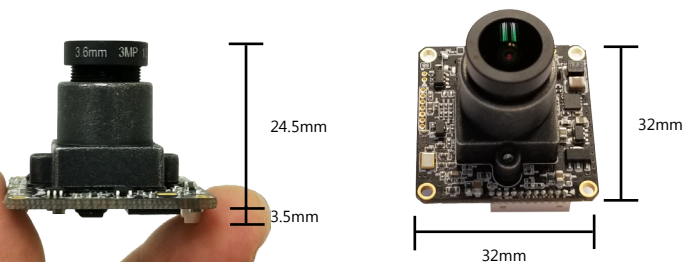

Technical Specification

Specification		NTSC / PAL
Image Device		1/2.8 inch 2 MP Sony STARVIS CMOS
Total Pixels / Active Pixels		1945(H) x 1109(V) / 1937(H) x 1097(V)
Scanning System		Progressive
Resolution		TVI, CVI, AHD: 1080P / CVBS:(1280H)_1000TVL
S/N Ratio		More than 52dB (AGC Off)
Video Output		HD-TVI/HD-CVI/AHD/CVBS (Pre-program up on Request) Selectable Output Signal by Optinal OSD Controller
Optional OSD Contol		LEFT: CVBS / RIGHT: AHD / DOWN: HD-TVI / UP: HD-CVI (Holding 5sec each Direction)
Minimum Illumination (F1.2, 30IRE)		COLOR: 0.05Lux / BW: 0.008Lux COLOR SENS-UP: 0.005Lux / BW SENS-UP: 0.0005Lux
OSD Functions	White Balance	ATW / AWC-SET / INDOOR / OUTDOOR / MANUAL / AWB
	Exposure	MANUAL
	Shutter Speed	AUTO/FLK, 1/30(25) - 1/50,000 sec
	Sens-up	AUTO(x6) / x2, x4, x6, x8, x10, x15, x20, x25, x30
	Backlight Compensation	OFF/ WDR / BLC / HSBLC
	Privacy Masking	4 Zone
	Day & Night	AUTO / COLOR / BW / EXT
	Motion Detection	OFF / ON
	3DNR	OFF / LOW / MIDDLE / HIGH
	Digital Effect	OFF / MIRROR / V-FLIP / ROTATE & FREEZE
	Sharpness / Defog	Adjustable / ON, OFF
	Image Enhancement	WDR
	Language	ENG/CHN1/CHN2/GER/FRA/ITA/SPA/POL/RUS/POR/NED/TUR
	Power Input / Consumption	
Operation / Storage Temp.		14°F ~ 122°F / -4°F ~ 140°F (-10°C ~ 50°C / -20°C ~ 60°C)
Dimension(mm)		32 x 32 (mm)
Cable		Standard 500mm BNC/DC Jack



Infinite Pixels Electronic USA Inc.
 6330 McLeod Dr Suite 2, Las Vegas NV 89120