

NVR808E-32

32 Channel 2U 8HDD Network Video Recorders

Key Features



- 32CH IP Video input, up to 12MP
- H.265+/H.265 dual-stream video compression
- Incoming/Outgoing bandwidth: 256Mbps/256Mbps
- Decoding: 16CH 1080P@30fps/8CH 4MP@30fps/6CH 5MP@30fps/4CH 4K@30fps
- Supports mainstream cameras of ONVIF and RTSP protocol
- HDMI 1/HDMI 2 asynchronous outputs, maximum resolution of HDMI is 4K
- Al by Camera: SMD, perimeter protection, face detection, etc.











Professional and Reliability

- H.265+ compression effectively reduces storage requirements by up to 75%
- Third-party cloud storage integration -Google Drive and Dropbox for video backup

Stability

Automatic network replenishment

Third-Party Compatibility

Supports ONVIF and RTSP protocols for seamless integration with third-party cameras

Smart Search and Playback

• Smart search and smart playback for the smart events triggered by humans or vehicles

HD Video Output

Provide simultaneous HDMI and VGA outputs, and dual asynchronous HDMI outputs



HDMI video output at up to 4K resolution

Storage and Playback

- Up to 8 SATA interfaces (up to 18 TB capacity per HDD)
- 16-ch synchronous playback

Network & Ethernet Access

- Dual self-adaptive 10/100/1000 Mbps Ethernet interface
- Homaxi-view for easy network management

Specification


Video & Audio Input					
IP Video Input	32 ch				
Audio Input	1 ch, RCA				
Video & Audio Output					
НДМІ	HDMI 1: 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz HDMI 2: 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz				
VGA	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz				
Audio Output	2 ch, RCA				
Recording					
Compression	H.265+/H.265/H.264+/H.264				
Resolution	12MP/8MP/5MP/4MP/3MP/1080P/720P/D1/CIF/QCIF				
Playback & Backup					
Playback Resolution	12MP/8MP/5MP/4MP/3MP/1080P/720P/D1/CIF/QCIF				
Decoding Capability	2 ch @ 12M 20fps 4 ch @ 8M 30fps 6 ch @ 5M 30fps 8 ch @ 4M 30fps 16 ch @ 1080P 30fps				
Synchronous Playback	16 ch				
Playback Mode	Smart Playback/Normal/Time Division/Label/Event/Picture Playback				
Backup Mode	USB Device/Network/eSATA				
Advanced Features					
Smart Detection By Camera	Area Intrusion, Line crossing, Region Entrance/Region Exiting, Fast Moving, Object Missing, Unattended Object, Loitering Detection, Parking Detection, Face Detection, People Gathering Detection, Blurred detection, Scene change detection, Audio exception detection, SMD, PP				
Smart Playback	Face detection/Line Crossing/Are Intrution/Motion Detection/Human Detection/Vehicle Detection				

Homaxi

Cloud Storage	Support				
Cloud Upgrade	Support				
Network					
Incoming Bandwidth	256 Mbps				
Outgoing Bandwidth	256 Mbps				
Ethernet	2 x RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface				
Protocols	HTTPs, HTTP, TCP/IP, IPv4, UPnP, RTSP, UDP, SMTP, SNMP, Multicast, NTP, DHCP, DNS, IP Filter, DDNS, FTP, P2P, ONVIF				
Mobile Surveillance	IOS, Android				
Hard Disk					
SATA	8 SATA interface				
Capacity	Up to 18TB capacity for each HDD				
External Interface					
USB Interface	Front panel: 2 × USB 2.0 Rear panel: 1 × USB 3.0				
eSata	1 × eSATA				
RS 485	2				
Alarm In	16 ch				
Alarm Out	4 ch				
General					
Operating Conditions	(-10°C ~ 55°C) (14°F ~ 131°F) Humidity 10% to 90%				
Power Supply	AC 100 ~ 240 V				
Power Consumption	MAX. 30 W (without HDD)				
Dimensions (W × D × H)	17.32" × 17.80" × 3.54", 2U (440 × 452 × 90 mm)				
Gross Weight	17.41 lb (7.9 kg)				
	1				


Homaxi

Dimensions

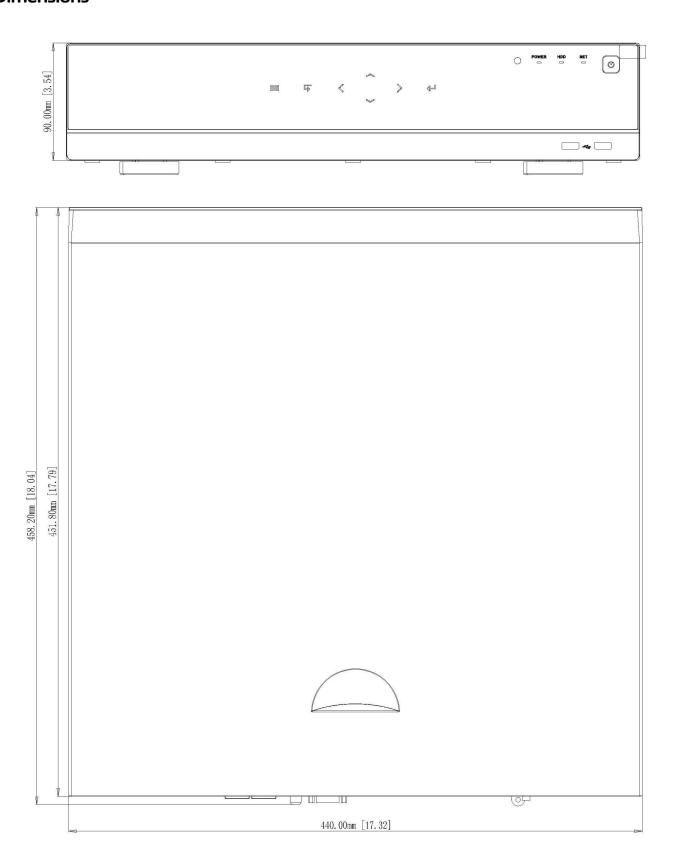

Homaxi

Rear Panel

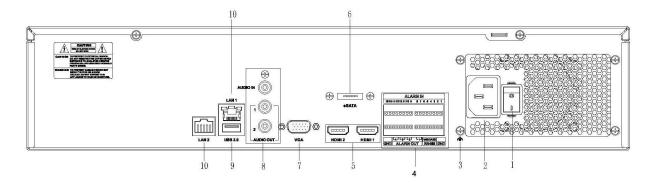

No.	Description	No.	Description
1	Power Switch	6	e SATA Port
2	Power Input	7	VGA Port
3	Ground	8	Audio IN/OUT RCA
4	Alarm Input	9	USB Port
5	HDMI Port	10	Network Port