



19 Inch Rear Mount PCAP Touch Monitor

R19ZH-OV-45P0

REAR MOUNT



GVision's line of rear mount projected capacitive displays are purpose built for system builders who require a rugged and durable touch screen solution that can easily be integrated into any embedded application. It is completely sealed to protect against the elements, which means it can be used either inside or out, and in high-traffic public facing applications.



10-Points Touch



DVI-D Digital Input



HDMI Digital Input



VGA Analog Input



USB B-Type Touch



IP65 Protected

LED

Backlight Unit



3-Year Warranty

19-Inch REAL MOUNT PCAP Touch Monitor



FEATURES


- 19-Inch Screen Size
- 1280 x 1024 Resolution
- Video Signal: **VGA** (15 Pin D-Sub) / **DVI** / **HDMI**
- **10-Points** Projective Capacitive **PCAP** Touch Technology
- **IP65** on the Front (Optional)
- **Zero Pressure** Touch Activation
- **LED** Backlight Unit
- **Metal** Enclosure Material
- **3-Year** Warranty

SPECIFICATIONS

DISPLAY	R19ZH-OV-45P0
Screen Size	19 In
Resolution	1280 x 1024
Backlight	LED
Aspect Ratio	5 : 4
Viewing Angle	170° / 160°
Response Time	5ms
Brightness	250cd/m ²
Contrast Ratio	1000 : 1
Color Depth	16.7 M
Display Area (mm)	376.32 x 301.06mm
INTERFACE	
HDMI	1
DVI	1
VGA (15 Pin D-Sub)	1
Audio	1
USB (B-Type)	1
TOUCH TECHNOLOGY	
Material	2 mm Glass
Points / Type	10 Max / Projected Capacitive (PCAP)
Accuracy	2 mm
CABINET	
Material	Plastic Frame / Metal Housing
Color	Black
POWER	
Consumption	20W Max Standby ≤ 0.5W
Electrical Ratings	12VDC ± 5% (Adapter Input AC 100V ~ 240V, 50/60Hz)
TEMPERATURE	
Operating	32° F ~ 104° F (0° C ~ 40° C)
Storage	-4° F ~ 140° F (-20° C ~ 60° C)
HUMIDITY	
Operating	20% ~ 80%
Storage	10% ~ 90%
DIMENSIONS (W×H×D)	
Inch (in)	17.2 x 14.3 x 1.8
Millimeter (mm)	438.6 x 363.7 x 47.0
WEIGHT	
Net Weight	11.0 lbs (5 kg)
COMPLIANT	
Certification	CE / FCC
VESA™	
Mount Size (mm)	100 x 100

Specifications subject to change without any notice

INPUT INTERFACE

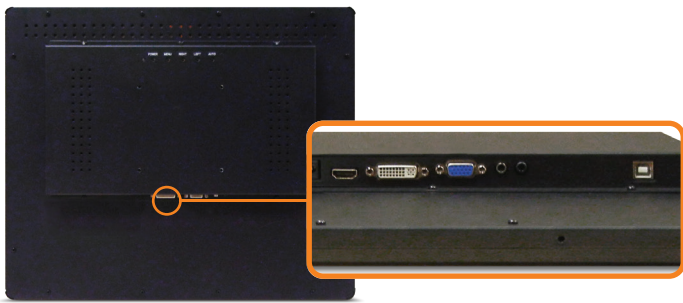

Multi Inputs

Gvision's KISOK Open Frame monitor supports both HDMI and DVI digital inputs and the VGA analog input to use as a normal office desktop or commercial digital signage.

DIMENSIONS

Unit: Inch

